




ECE-R65 CLASS 2 FLUSH MOUNT


ENFSRE2(x) - FLUSH MOUNT BLACK GROMMET

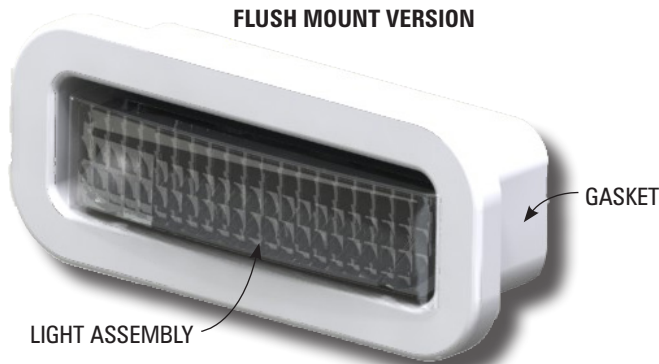

FLUSH MOUNT VERSION

GASKET

LIGHT ASSEMBLY

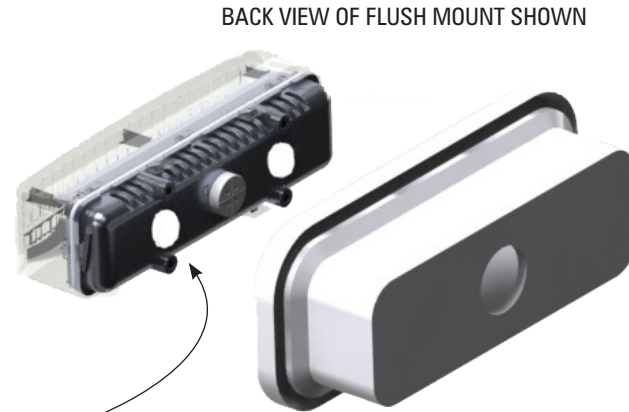

BACK VIEW OF FLUSH MOUNT SHOWN

DO NOT DAMAGE, BLOCK OR TOUCH THE BREATHER PATCHES

TECHNICAL SPECIFICATIONS	
DECK/ GRILL MOUNT NEXUS	
Single Mount Dimensions:	5.0"L x 1.88"H x 1.82"D
Double Mount Dimensions:	9.50"L x 1.88"H x 1.82"D
Input Voltage:	10 - 30 Vdc per module
CURRENT CONSUMPTION	
9 LED Single Color	<1.6A @ 12.8 Vdc
	<0.9A @ 25.6 Vdc

INSTALLATION:

SURFACE MOUNT


- 1) Establish a position on the vehicle. Use the cutout template (provided) on second page and cut hole. Insert Grommet into cutout first, then press light assembly into grommet.

INFORMATION FOR NEXUS SECONDARY:

WIRE HOOK-UP TABLE

WIRE COLOR:	FUNCTION:
RED	Power
BLACK	Ground
GREEN	Sync2 *
WHITE TO GROUND	Pattern Select
WHITE TO POWER	By Night Feature See page 2

* Will NOT work w/ other sync products such as Ghost, LED3, & Interceptor.

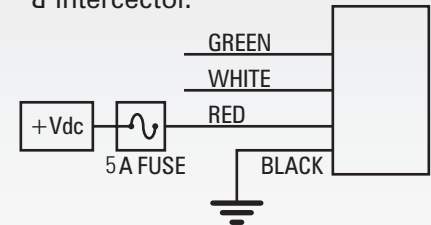

WARNING
 This product contains high intensity LED devices. To prevent eye damage, DO NOT stare into the light beam at close range.

Important Information:

- Warning devices are strictly regulated and governed by Federal, State and Municipal ordinances. These devices shall be used ONLY on approved vehicles. It is the sole responsibility of the user of these devices to ensure compliance.
- DO NOT connect this device to a strobe power supply. This product is self-contained and does not require an external power supply.

IMPORTANT INFORMATION:

Warning devices are strictly regulated and governed by Federal, State and Municipal ordinances. These devices shall be used ONLY on approved vehicles. It is the sole responsibility of the user of these devices to ensure compliance.

To review our Limited Warranty Statement & Return Policy for this or any SoundOff Signal product, visit our website at www.soundoffsignal.com/sales-support. If you have questions regarding this product, contact **Technical Services**, Monday - Friday, 8 a.m. to 5 p.m. at 1.800.338.7337 (press #4 to skip the automated message). Questions or comments that do not require immediate attention may be emailed to techservices@soundoffsignal.com.




1.800.338.7337 / www.soundoffsignal.com

SUPERIOR CUSTOMER RELATIONSHIPS. SMARTLY DESIGNED LIGHTING & ELECTRONIC SOLUTIONS.



PATTERNS	
NUMBER	NAME
1	SINGLE
2	DOUBLE
3	TRIPLE

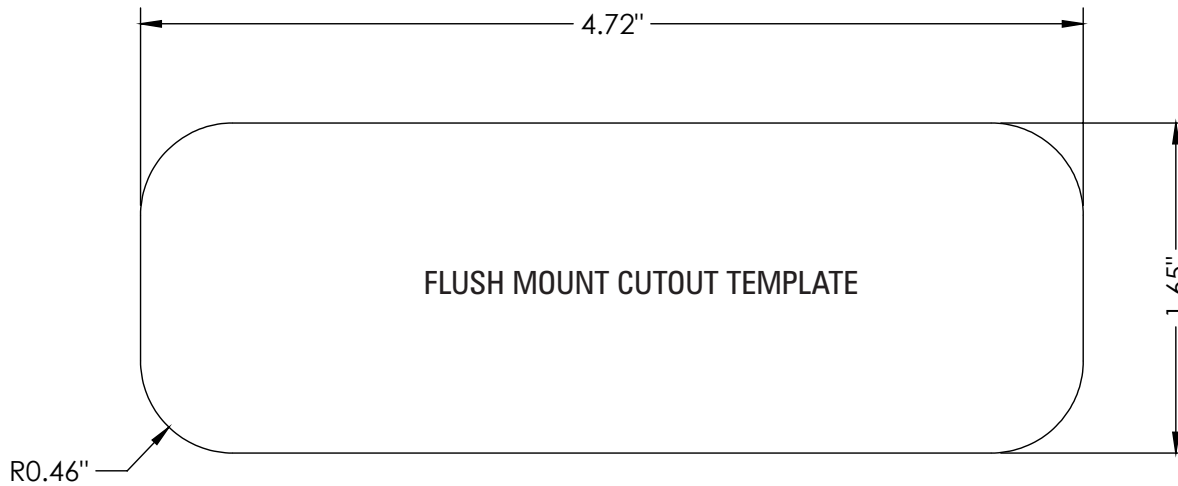

PATTERN SELECT & SYNC CONFIGURATION INSTRUCTIONS

Connecting the **WHITE** wire to power will allow you to use the **By Night** feature on your Nexus Secondary Light.

BY NIGHT FEATURE:

- Reduced intensity for night time use
- Apply power to white wire

BY DAY FEATURE:

- Standard intensity for day time use
- Leave white wire floating

SETUP LIGHTS:

- To sync multiple nForce lights, connect the green wires together

Simultaneous or Alternate Function

- 1 or 2. The modules will flash simultaneously if they are set to the same number. The modules will have an alternate flash if set to different numbers.*

***Modules in the Dual Deck/Grille version must be alternating and not synchronized for certification approval to be valid.**

Touching the **WHITE** wire to the ground will allow you to change various setting on the module.



1.800.338.7337 / www.soundoffsignal.com

SETUP TABLE			
SECONDS		USER INTERFACE	
FROM	TO	VISUAL FEEDBACK	ACTION TAKEN
0	1	STEADY-HIGH (60%)	FORWARD ONE PATTERN
1	2	STEADY-LOW (30%)	BACKWARD ONE PATTERN
2	3	OFF	NA
3	4	STEADY - HIGH (60%)	SIMULTANEOUS OR ALTERNATE
4	5	STEADY - LOW (30%)	NA
5	6	OFF	RESET TO PATTERN 1

If held longer than 6 seconds, the light will go back to flashing the current pattern and no action will be taken.