




NOTE: THIS KIT ONLY SUPPORTS ONE LIGHT. MUST PURCHASE 2 HARDWARE KITS TO SUPPORT BOTHSIDES OF VEHICLE.

SUPPORTED PART NUMBERS FOR THIS BRACKET KIT

ESLRL5004(x) - SL RUNNING LIGHT 4 MOD, SINGLE 50" ESLRL6105(x) - SL RUNNING LIGHT 5 MOD, SINGLE 61" ESLRL7306(x) - SL RUNNING LIGHT 6 MOD, SINGLE 72"

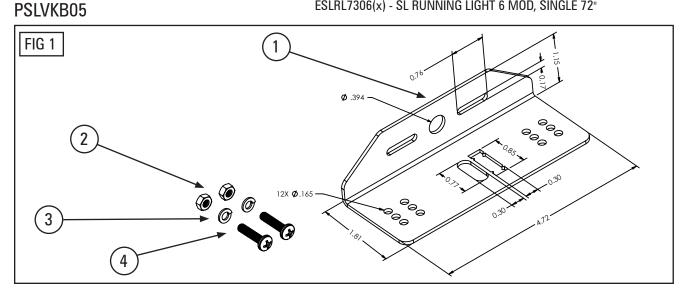





INSTALLATION:

- Establish a position on the left and right bottom side of the vehicle running boards to mount the SL light. Fig 2 and Fig 3 show different mounting options for the Aluminum bracket.
- Evenly space brackets approximately 18" apart from each other depending on the length of the SL light.
- Take the two provided M4 round head thread screws and install to vehicle in the desired location.
- Using the provided hardware with the SL light, slide the M6 bolt into the rail (Fig 2 and 3) and mount to the desired mounting position on the bracket.
- If necessary, drill a 5/16" diameter hole for wires to route through and seal the hole up with silicone.

CONTAINS		
#	QTY*	COMPONENT
1	4	ALUMINUM BRACKET
2	8	M4 HEX NUT, 3MM STAINLESS
3	8	M4 SPRING WASHER 4.2
4	8	M4 ROUND HEAD X 18MM, 0.7MM THREAD STAINLESS



Installers and users must comply with all applicable federal, state and local laws regarding use and installation of warning devices.

Improper use or installation may void warranty coverage.

To review our Limited Warranty Statement & Return Policy for this or any SoundOff Signal product, visit our website at www.soundoffsignal.com/tech-services/returns/.

If you have questions regarding this product, contact Technical Services, Monday - Friday, 8 a.m. to 5 p.m. or after hours 5 p.m. to 8 p.m. ET at 1.800.338.7337 (press #4).

Questions or comments that do not require immediate attention may be emailed to techservices@soundoffsignal.com.

