

3900 Central Parkway Hudsonville, MI 49426 toll free 800.338.7337 office 616.896.7100 techsupport@soundoffsignal.com www.soundoffsignal.com

PART NUMBERS

ERDREBZ-24A Amber ERDREBZ-24R Red ERDREBZ-24B Blue ERDREBZ-24W White

MOUNTING INSTRUCTIONS Grommet

- Α.
- Cut a 4-1/2" hole in the vehicle if needed.
- B. Push rubber arommet into the hole until it seats.
- C. Feed the light wires through the hole and connect to the wire harness in the vehicle.
- NOTE: Connector on the light is designed to mate with an AMP Sure Seal Connector.
- Push the light into the grommet until it seats. D.

Remote Flasher Operation:

In remote mode, whenever power is supplied to the Red wire, the Light will be ON. To operate LED Light in this mode connect the wires as follows:

Black Wire: Ground Red Wire: Connect to Remote Flasher White Wire: Ground


Self Contained Flasher Operation:

In self-contained flasher mode, whenever power is supplied to the Red wire, the Light will flash the pattern stored in memory. To change the pattern stored in memory, momentarily ground the White wire. When desired pattern is selected, tape the end of the white wire. To operate LED Light in this mode connect the wires as follows:

Black Wire:	Ground
Red Wire:	Connect to Switched +24V
White Wire:	Momentarily ground to change pattern, the tape end.

WARNING: This LED Warning Light is NOT intended to operate in a Steady Burn Mode. Doing so will result in a premature failure.

4" ROUND WARNING LIGHT 24 VOLT

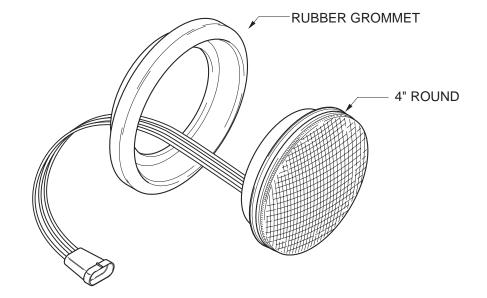

A١

tterns:		
180 fpm	Double Flash	70 fpm
220 fpm	Quad Flash	70 fpm
70 fpm	Single Flash	114 fpm
350 fpm	Double Flash	140 fpm
	220 fpm 70 fpm	180 fpmDouble Flash220 fpmQuad Flash70 fpmSingle Flash

WARRANTY

SoundOff Signal warranties it's LED Vehicle Signaling Products to be free from defects in material and workmanship under normal use for a period of five (5) years from date of manufacture. LED Products or devices will be considered in warranty when 10% of the total LED diodes within them fail to illuminate properly during the warranty period. Connectors and pigtails will be warrantied for a period of three (3) years if conductive grease or other weather sealing compound is used on the connector or pigtail. The start of this period is determined by the date imprinted on the product itself or a label which is adhered to the product. Warranty is extended to the original purchaser of the product, whether this is a manufacturer of the vehicle / equipment in which the SoundOff Signal products have been installed or the first consumer of the SoundOff Signal product from an authorized agent or dealer and not to any subsequent party. The product must be returned with a copy of the original sales receipt that the user was given to be given claim consideration

This limited warranty shall not be extended to cover SoundOff Signal products or any parts thereof in which defects in equipment have been caused by misuse, neglect, unauthorized alterations or repairs, incorrect wiring, water or chemical damage caused by the use of incompatible cleaners, solvents or chemicals. This warranty also does not apply to severe duty applications, such as off-road or construction equipment applications.

SoundOff Signal will not be liable for incidental or consequential damage, including but not limited to: loss of use of vehicle, rental of a substitute vehicle, loss of time, loss of work, transportation expenses, inconvenience, telephone, lodging and or loss of personal property for or arising out of breach of any implied warranty of it's products.