




SOLAR PANEL

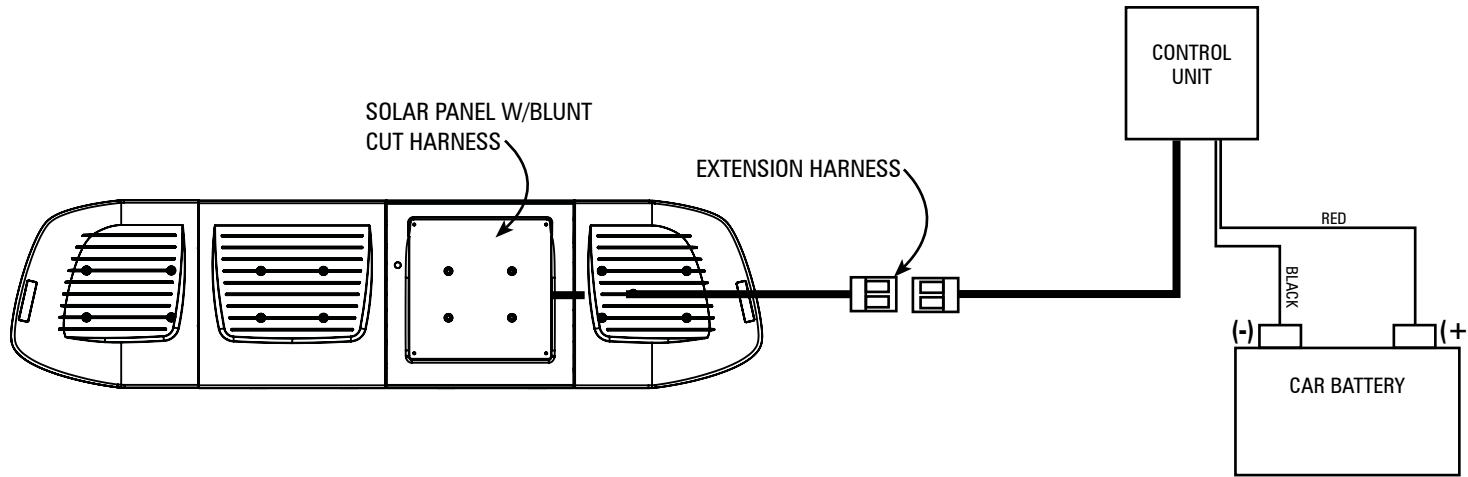

SOLAR PANEL HOOK-UP

1. Splice the blunt cut solar panel harness to the extension harness supplied with your lightbar.
2. Mount the control unit under the hood close to the car battery with 2 screws (not supplied.)
3. Hook the solar panel wires up to the car battery (Red to +, Black to -.)
4. Plug the connector on the extension wire into the mating connector on the supplied solar panel battery.

⚠ WARNING

- HIGH CURRENT interconnects must be properly terminated. Poor crimp quality can cause heat build-up and fire. Follow crimp connector manufacturer instructions.
- DO NOT install this product or route any wires in the Air Bag Deployment Zone. Refer to vehicle Owner's Manual for deployment zones.
- Do NOT use system to disconnect headlights, brake lights or other safety equipment.
- Unit may become hot to touch during normal operation.
- Failure to properly install connectors, fuses or wiring may cause vehicle failure or fire.
- Installation must only be performed by trained technician. Installer must determine vehicle wiring configuration and proper integration of system.
- Use proper wire gauge. All power wires connecting to positive (+) or negative (-) battery terminal or local chassis ground (-) must be sized to supply at least 125% of max. current and properly fused at power source.
- Install protective grommets when routing wire through firewall or metal.

SOLAR PANEL TECHNICAL SPECIFICATIONS

Overall Dimensions:	Solar Panel: 8.75"L x 8.75"W x 0.125"H Circuit Box: 3.75"L x 2.75"W x 1.5" H
Max Charge Current:	350 mA
Max Output Voltage:	16.5Vdc
Pulse Frequency:	18-36 kHz
Lug Cable Length:	3'-0"

NOTICE:

Installers and users must comply with all applicable federal, state and local laws regarding use and installation of warning devices.



Improper use or installation may void warranty coverage. To review our Limited Warranty Statement & Return Policy for this or any SoundOff Signal product, visit our website at www.soundoffsignal.com/sales-support. If you have questions regarding this product, contact **Technical Services**, Monday - Friday, 8 a.m. to 5 p.m. or after hours 5 p.m. to 8 p.m. EST at 1.800.338.7337 (press #4 to skip the automated message). Questions or comments that do not require immediate attention may be emailed to techservices@soundoffsignal.com.

SUPERIOR CUSTOMER RELATIONSHIPS. SMARTLY DESIGNED LIGHTING & ELECTRONIC SOLUTIONS.